



Ecosine 400-480 VAC 50Hz Economy Passive Harmonic Filters

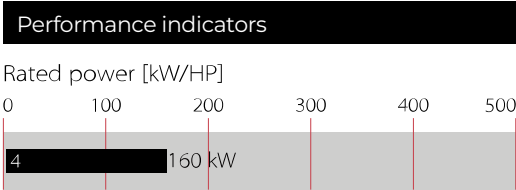

- Economy line of passive harmonic filters for THDi <10%
- Help to comply with EN 61000-3-12, IEEE-519 and other PQ standards
- Support an efficient utilization of electrical system capacity
- Ideal for motor drives with 6-pulse rectifier front-end
- Suitable for diode and thyristor (SCR) rectifiers applications



Technical Specifications

Nominal operating voltage	3x 380 to 500 VAC ±10%
Operating frequency	50Hz ±1 Hz (FN 3416)
Nominal motor drive input power rating	4 to 160 kW
Total harmonic current distortion THDi*	<10% @ rated power (with DC-Link choke) <15% @ rated power (without DC-Link choke)
Total demand distortion TDD	According to IEEE-519
Efficiency	>98% @ nominal line voltage and power
Overload capability	1.6x rated current for 1 minute, once per hour
SCCR**	100 kA
High potential test voltage	P -> E 2500 VAC (2 sec)
Earthing System	TN, TT, IT
Protection category	IP 20
Cooling	Internal fan cooling, unregulated
Ambient temperature range	-25°C to +45°C fully operational +45°C to +70°C derated operation*** -25°C to +70°C transport and storage
Design corresponding to	UL 508, EN 61558-2-20, CE (LVD2006/95/EC)
Flammability corresponding to	UL 94 V-2 or better
MTBF @ 45°C/500 V (Mil-HB-217F)	200,000 hours

* System requirements: THVD <2%, line voltage unbalance <1%
Note: performance specifications in this datasheet refer to six-pulse diode rectifiers.
SCR rectifier front-end will produce different results, depending upon the firing angle of the thyristors.

** External UL-rated fuses required.

*** Iderated = Inominal * √(70°C-Tamb)/25°C

Approvals & Compliances

CE

UKCA

RoHS

UL

US LISTED

Features and Benefits

FN 3416 (50 Hz) models of the ECOsine product family represent the very compact “economy line” with a THID performance of ≤10% (with Ldc).

They are ideal for non-linear three-phase equipment with B6 rectifier front-end that do not require the industry leading <5% THID performance provided by Schaffner ECOsine FN 3410/12 filters.


The performance is still sufficient to comply with EN 61000-3-12 or with IEEE-519 for Isc/IL <50. Schaffner ECOsine filters help to unburden the electrical infrastructure from excess loading and heat caused by current harmonics, and therefore support a better utilization of electric system capacity.

Lower harmonics also reduce the risk of system resonances and potential downtime of sensitive electronic equipment.

FN 3416/18 filters upgrade standard motor drives to “low-harmonic drives” quickly and easily.


Typical Applications

- Three-phase power conversion equipment with front-end six-pulse rectifier (diode or SCR)
- Motor drives, like those used e.g. in pump and fan applications
- Battery chargers, incl. DC fast chargers for e-cars

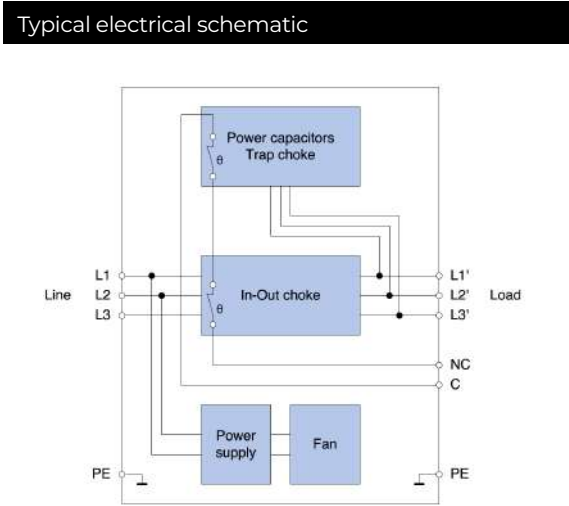


Filter Application


ECOsine filters are best installed directly at the input of 6-pulse rectifiers. It is possible to connect several non-linear loads (e.g. motor drives) in parallel. In this case the rating of the filter must match the sum of the power ratings of drives connected to it. The use of a (built-in) DC-link choke is recommended for best harmonics mitigation performance. If the expected input power exceeds the rating of the largest available filter, and a custom solution is not desired, then two or more filters can be wired in parallel. In this mode of operation, it is recommended to use filters with equal power ratings to ensure proper current sharing.

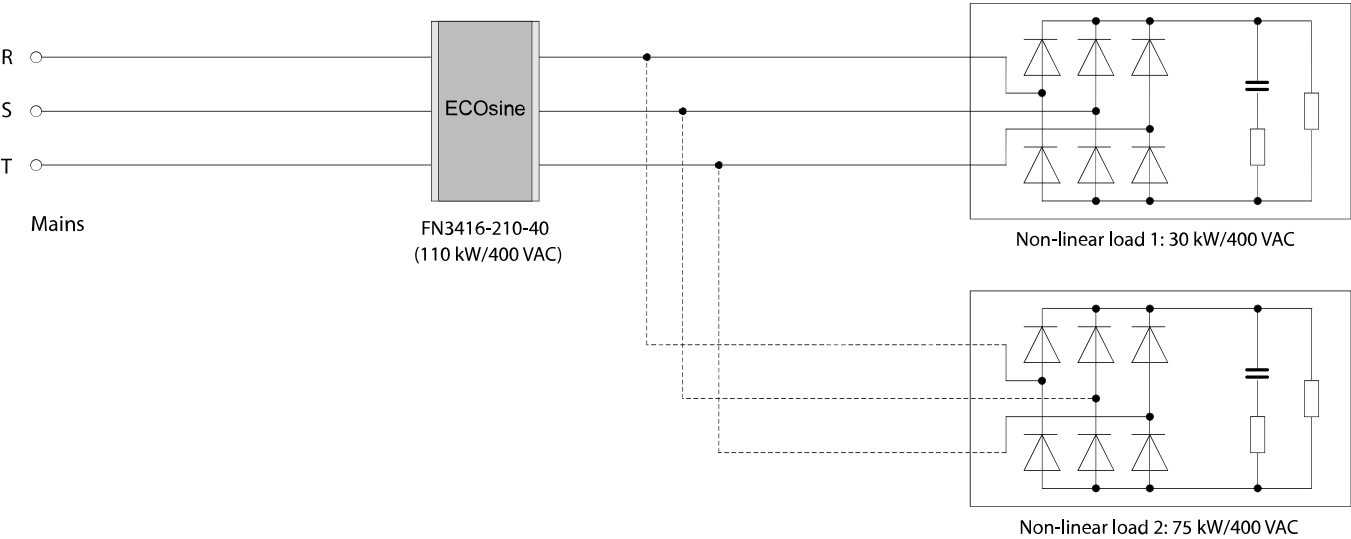

Typical Filter Performance

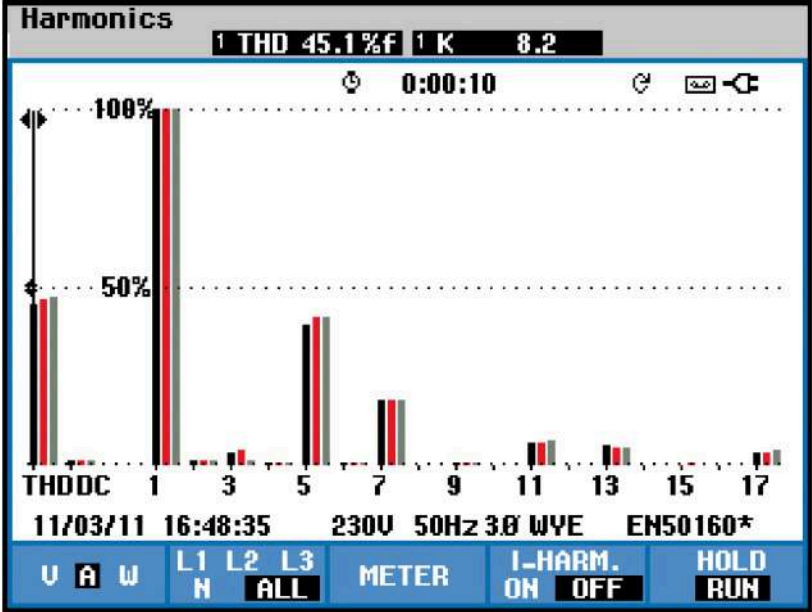

Motor drive with Ldc, without harmonic filter

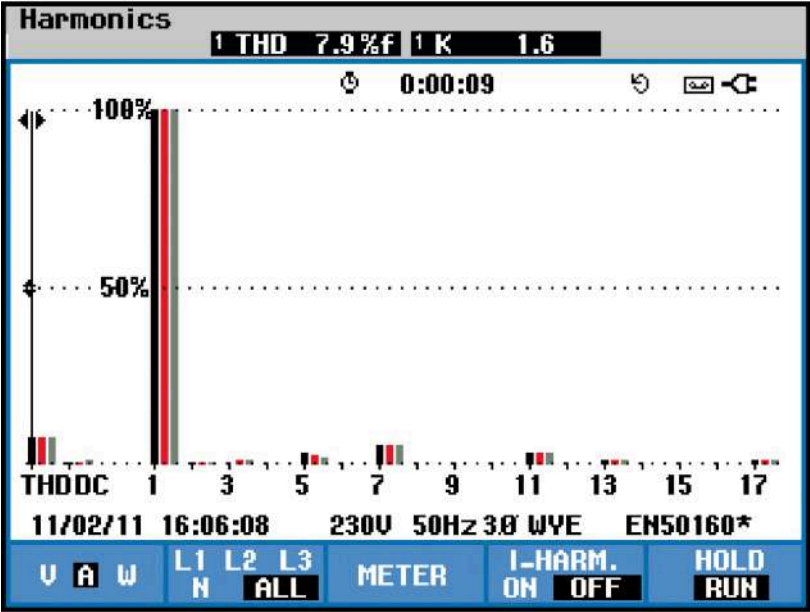

Motor drive with Ldc, with ECOsine FN 3416



Filter Selection Table


Filter*	Rated load power @ 400 VAC/50 Hz	Rated load power @ 500 VAC/50 Hz	Power loss** @ 25°C/50 Hz	Input /output connections		Weight
	[kW]	[kW]	[W]			[kg]
FN 3416-10-44	4	5.5	63	-44		10
FN 3416-13-44	5.5	7.5	82	-44		10
FN 3416-16-44	7.5	11	105	-44		15
FN 3416-24-33	11	15	153	-33		20
FN 3416-32-33	15	18.5	294	-33		22
FN 3416-38-33	18.5	22	256	-33		25
FN 3416-45-33	22	30	306	-33		29
FN 3416-60-34	30	37	408	-34		37
FN 3416-75-34	37	45	410	-34		43
FN 3416-90-35	45	55	493	-35		47
FN 3416-110-35	55	75	546	-35		50
FN 3416-150-40	75	90	784	-40		86
FN 3416-180-40	90	110	817	-40		92
FN 3416-210-40	110	132	887	-40		100
FN 3416-260-99	132	160	947		-99	125
FN 3416-320-99	160	200	988		-99	135

* Filter to be selected by system voltage and load (motor drive) power. Note: the harmonic filter will reduce RMS input current. Therefore, filter selection by current rating, as it is common for EMC/EMI filters, is not recommended.

** Calculated power loss at rated load power.

Mechanical Data

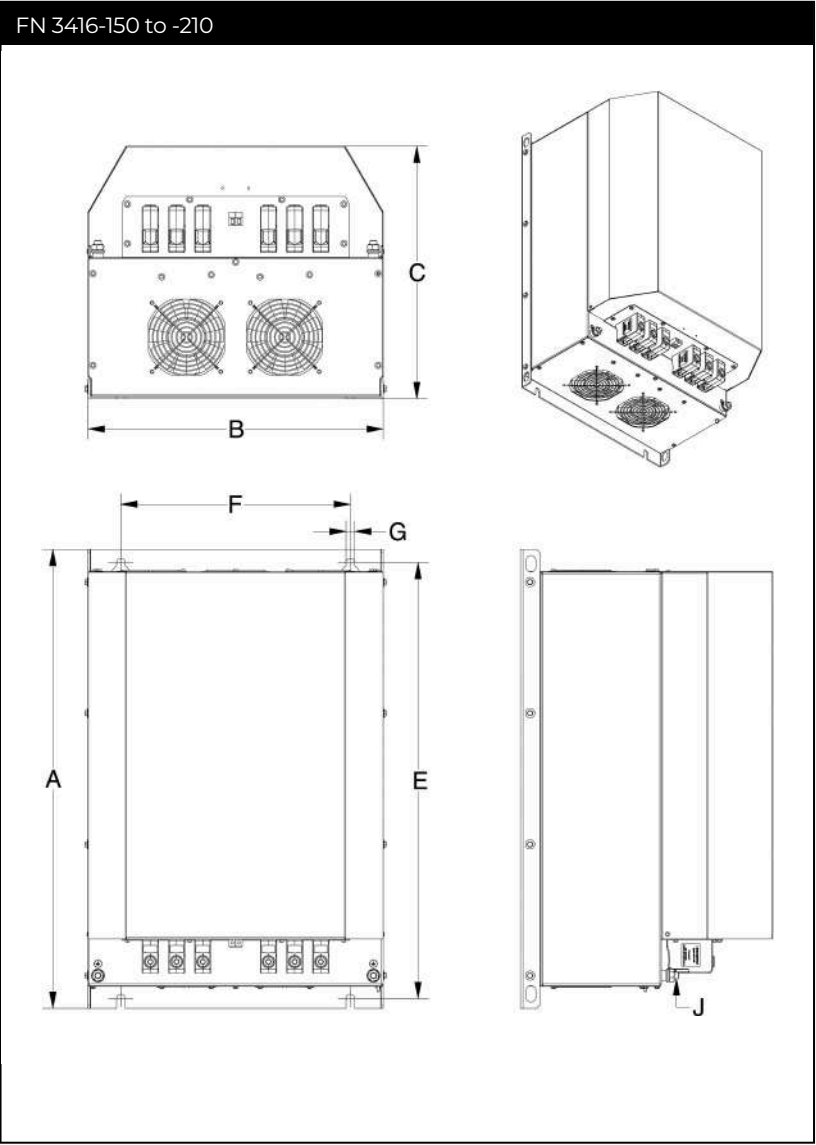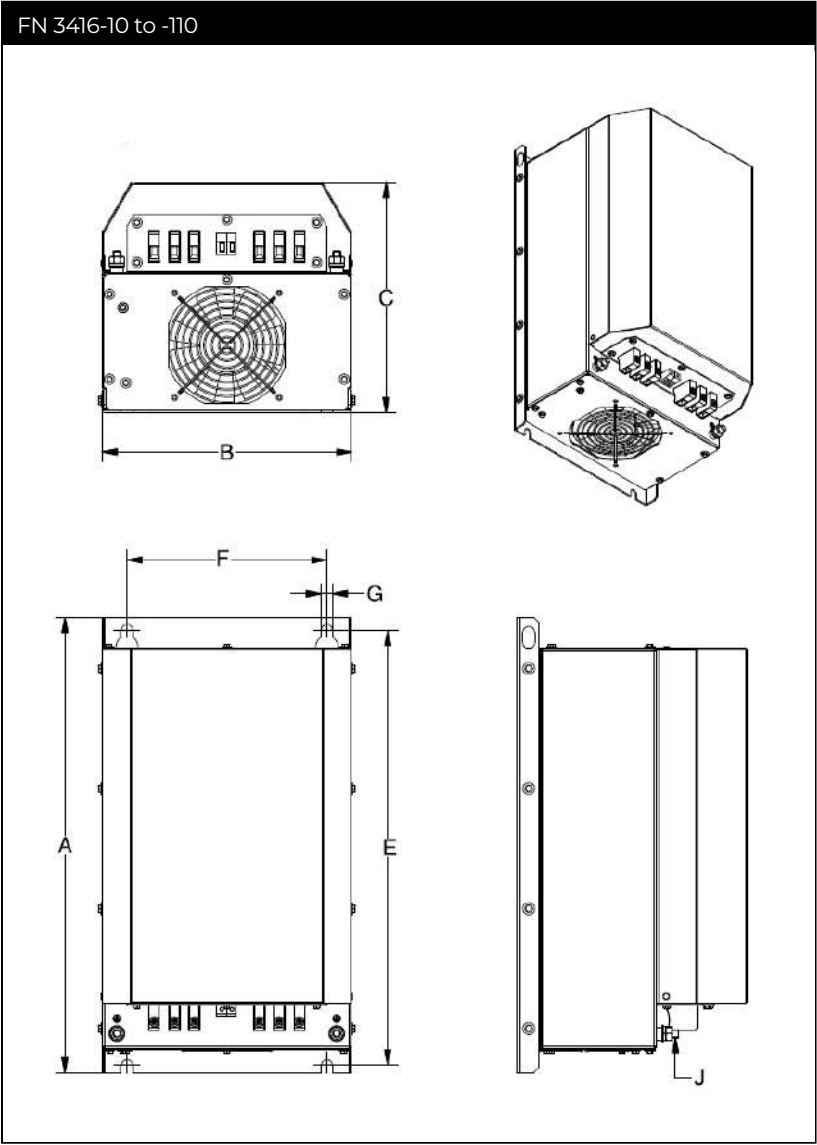

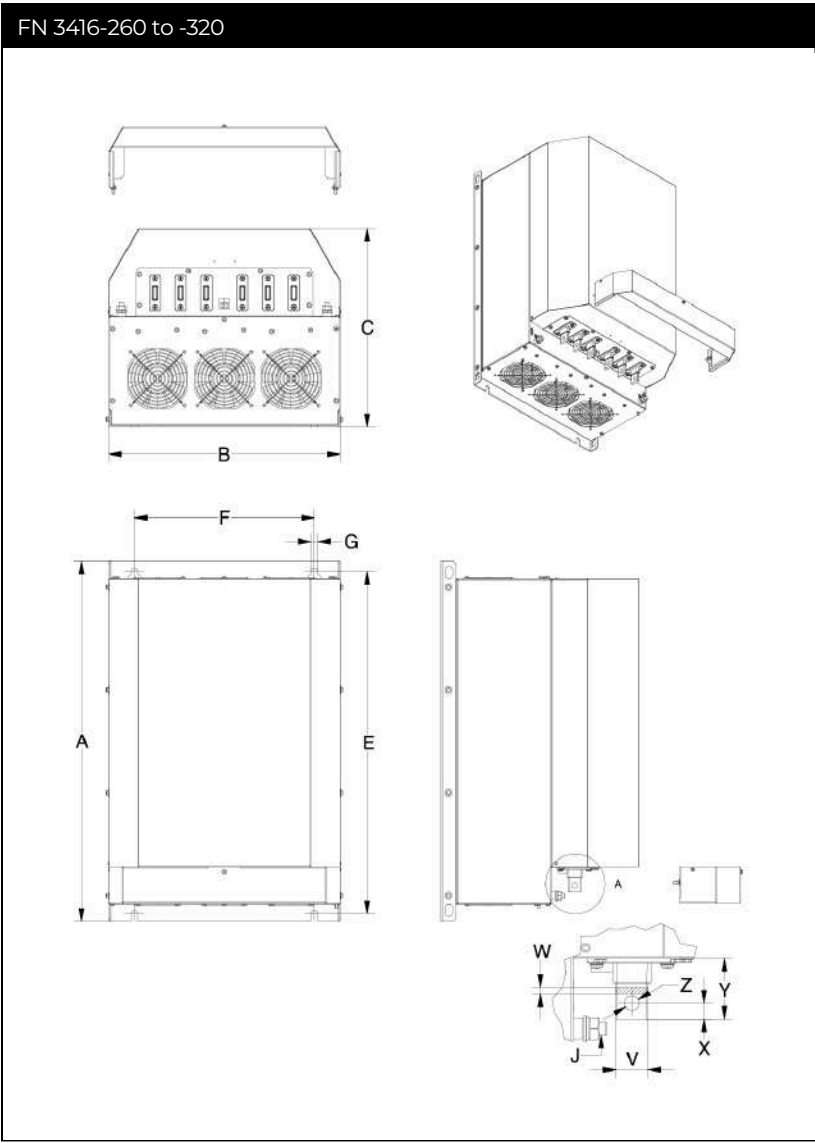

Dimensions

FN 3416-...	10	13	16	24	32	38	45	60	75	90	110	150	180	210	260	320
A	390	390	390	455	455	455	455	520	520	580	580	700	700	700	700	700
B	185	185	185	250	250	250	280	280	280	280	280	450	450	450	450	450
C	190	190	190	230	230	230	230	248	248	248	248	385	385	385	385	385
E	370	370	370	435	435	435	435	500	500	555	555	665	665	665	665	665
F	140	140	140	200	200	200	200	225	225	225	225	350	350	350	350	350
G	9	9	9	11	11	11	11	11	11	11	11	13	13	13	13	13
J	M6	M6	M6	M8	M8	M8	M8	M8	M8	M10	M10	M10	M10	M10	M10	M10
V															25	25
W															6	6
X															12.5	12.5
Y															47	47
Z															11	11

All dimensions in mm; 1 inch = 25.4 mm
Tolerances according to: ISO 2768-m/EN 22768-m

Filter connector cross sections	-33	-34	-35	-40	-44
Solid wire	16 mm ²	35 mm ²	50 mm ²	95 mm ²	10 mm ²
Flex wire	10 mm ²	25 mm ²	50 mm ²	95 mm ²	6 mm ²
AWG type wire	AWG 6	AWG 2	AWG 1/0	AWG 4/0	AWG 8
Recommended torque	1.5–1.8 Nm	4.0–4.5 Nm	7–8 Nm	17–20 Nm	1.0–1.2 Nm

Installation

For more detailed information and step by step installation guidelines, please consult the user manual at www.schaffner.com or the installation instructions (delivered with each filter).

Headquarters, Global
Innovation and
Development

Switzerland
Schaffner Holding AG
Industrie Nord
Nordstrasse 11e
4542
Luterbach
+41 32 681 66 26
info@schaffner.com

Sales and Application
Centers

Switzerland
Schaffner EMV AG
Industrie Nord
Nordstrasse 11e
4542
Luterbach
+41 32 681 66 26
switzerlandsales@schaffner.com

China
Schaffner EMC Ltd. Shanghai
T20-3 C No 565 Chuangye Road Pudong
district
201201
Shanghai
+86 2138139500
cschina@schaffner.com

Singapore
Schaffner EMC Pte Ltd.
Blk 3015A Ubi Road 1 #05-09 Kampong Ubi
Industrial Estate
408705
Singapore
+65 63773283
singaporesales@schaffner.com

To find your local partner within
Schaffner's global network schaffner.com

© 2022 Schaffner Group

The content of this document has been
carefully checked and understood.
However, neither Schaffner nor its
subsidiaries assume any liability
whatsoever for any errors or inaccuracies
of this document and the consequences
thereof. Published specifica-tions are
subject to change without notice. Product
suitability for any area of application must
ultimately be determined by the
customer. In all cases, products must
never be operated outside their published
specifications. Schaffner does not
guarantee the availability of all published
products. This disclaimer shall be
governed by substantive Swiss law and
resulting disputes shall be settled by the
courts at the place of business of Schaffner
Holding AG. Latest publications and a
complete disclaimer can be downloa-ded
from the Schaffner website. All trademarks
recognized.